

# BRIGHTLY SOFTWARE CUSTOM 10x10

## SETUP INSTRUCTIONS



EXHIBITS | EVENTS | CREATIVE SERVICES


BRIGHTLY - 10x10



Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____
Job	5751			
Description	Setup Instructions			




BRIGHTLY - 10x10

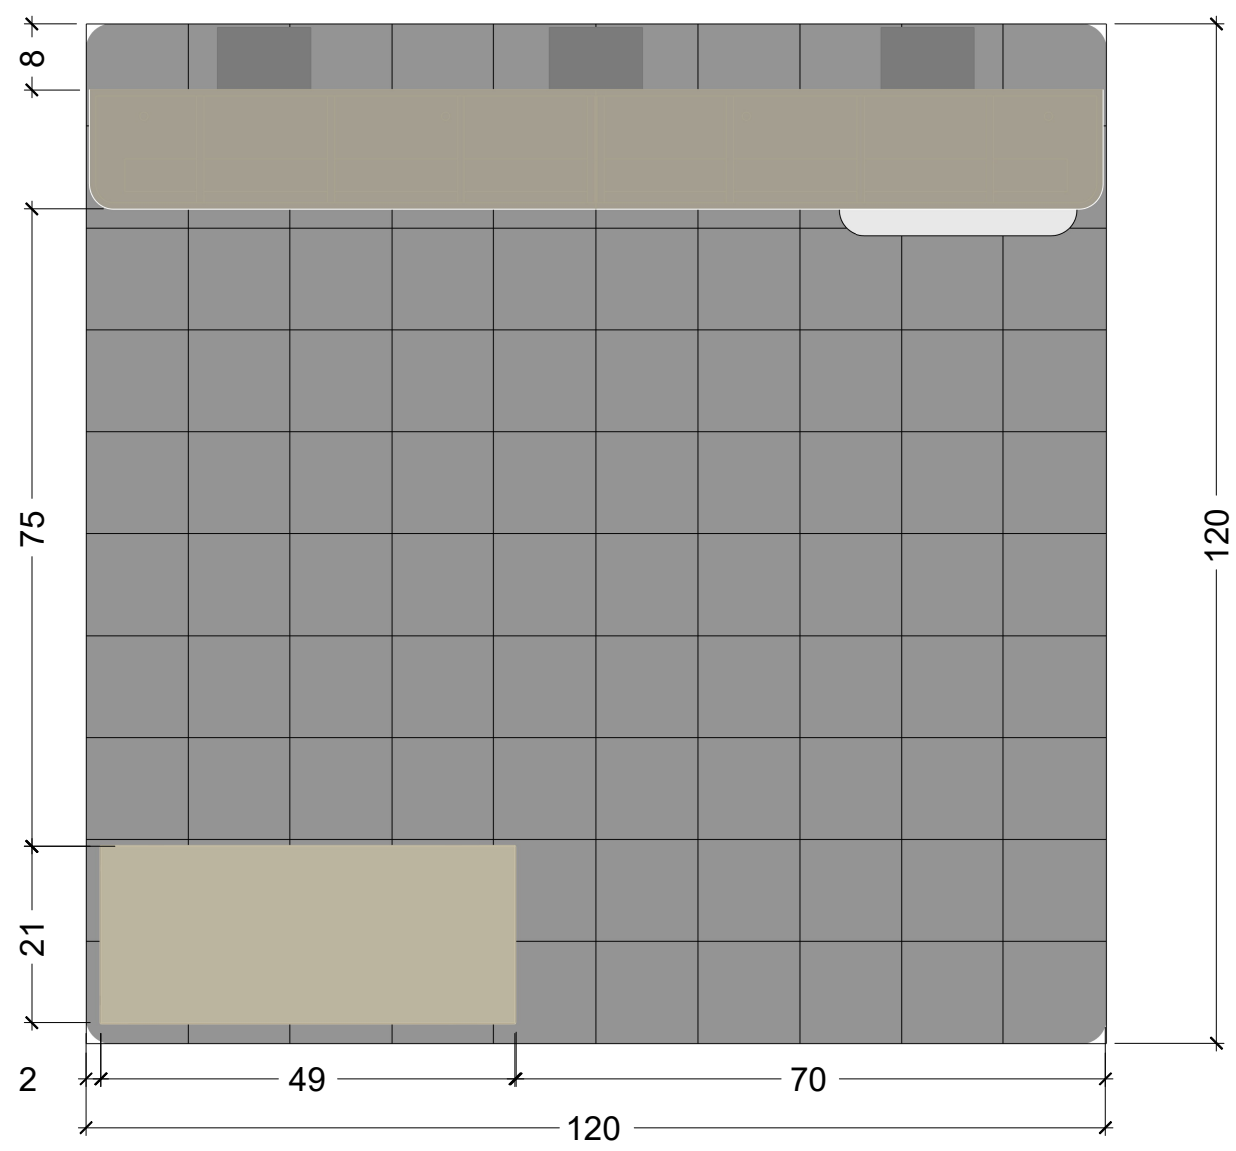

Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____ DATE: _/_/_
Job	5751			
Description	Setup Instructions			



# ELECTRICAL - BOOTH #726

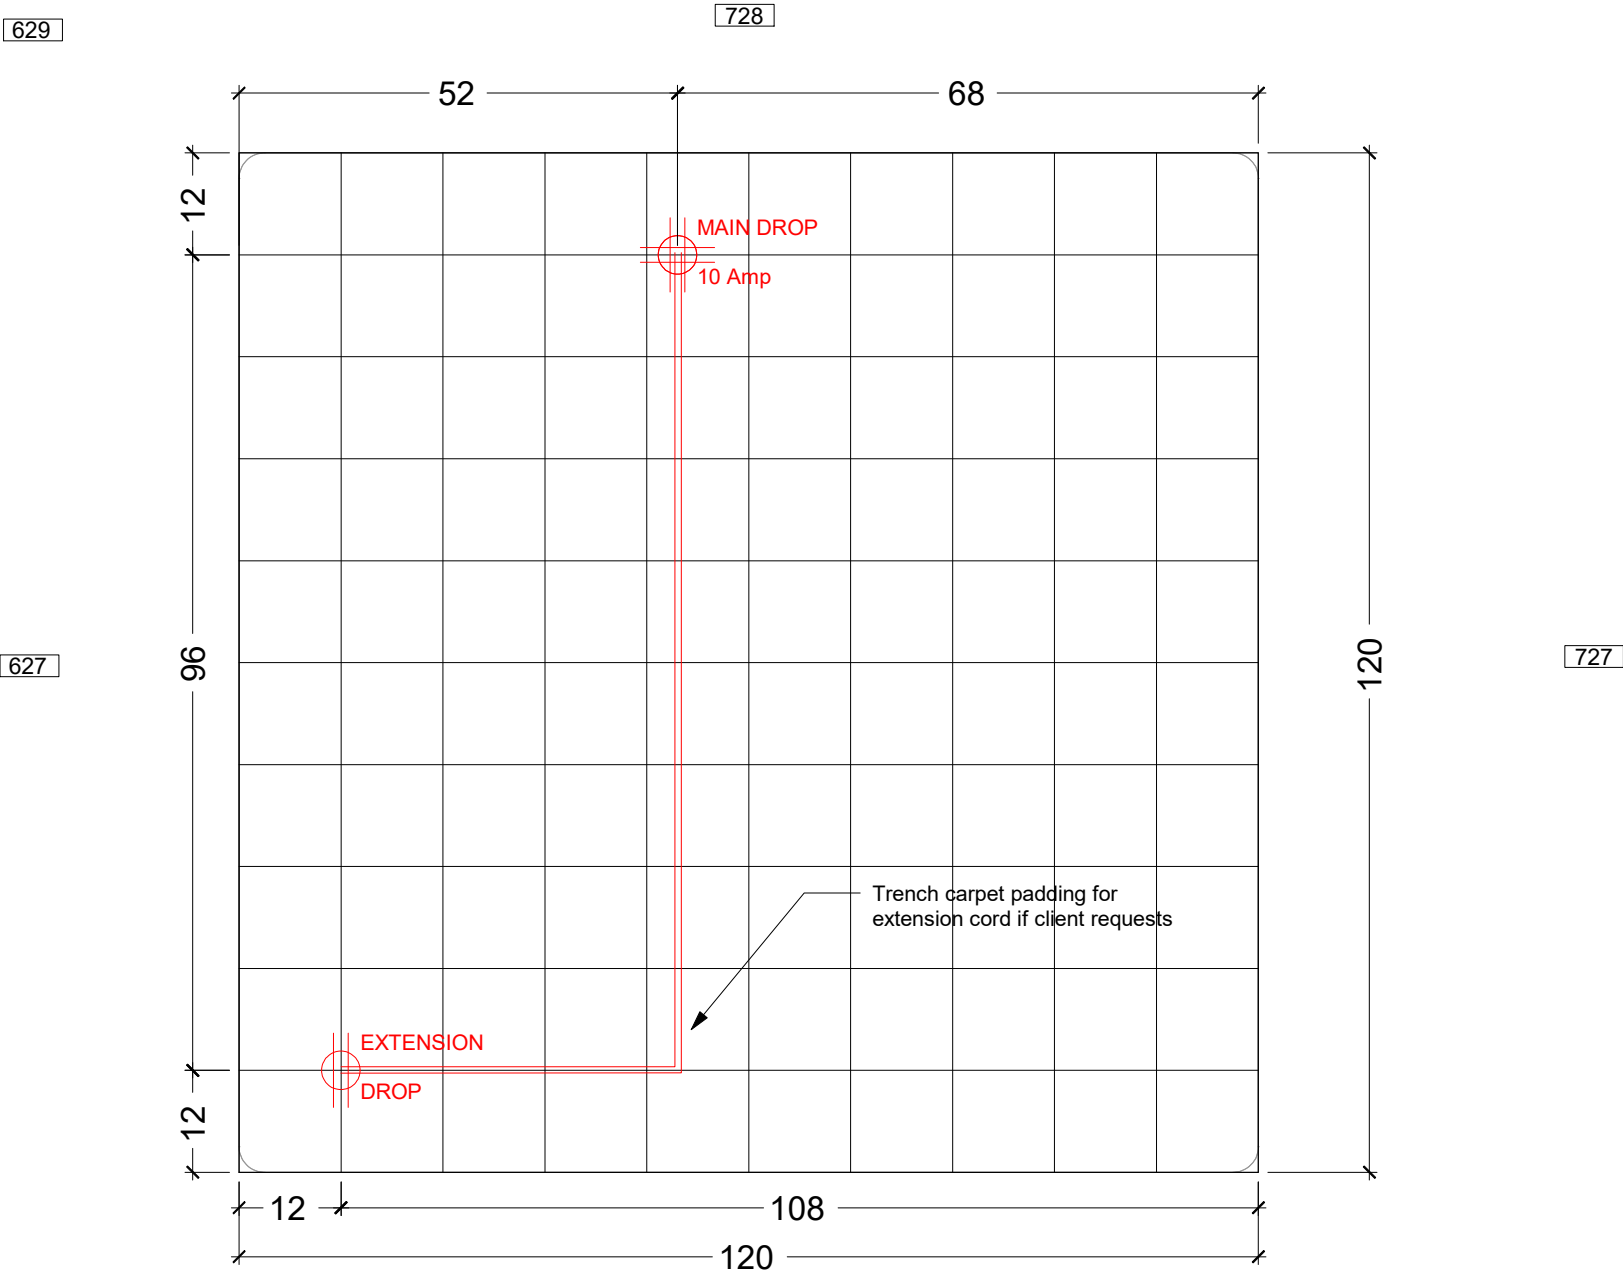

Client	Brightly Software		Notes: Req. (1x) 10 Amp drop	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____
Job	5854			
Description	Show Service Drawings - ELECTRICAL - BOOTH #726			
	DATE: ____/____/____			



g 535	Trane* 20'
High Desert 533	632
Stradli ng 531	EdFile s* 630
B&H Photo 529	Burnh am* 628
Image Sourc 527	RWP Lands 626

Vanir Con*st 633	J+J Floori 732
Enter prise 631	Bonfir e* 730
NCPA * 629	CBIZ Valuat 728
Nigro & 627	

VS Ameri Inc* 733	Group 834
20'	Golde n* 832
Rocke tScan 731	Siplas t 830
Sierra School* 727	OES 828
20'	KYA 826

HOSPIT STAT
SEWU P* 831
Keyg ent 829
Hour Zero 827

BRIGHTLY  
BOOTH #726

Regio nal* 523	Tyler Technologi 20'
KNN Public 521	620

20' CASBO Mall 30'
-----------------------------

PARS * 723	Crow e LLP 822
hns ontrols* 720	Erick son 820

Weath erWel 823
South ern 821


Client	Brightly Software	Notes: Req. (1x) 10 Amp drop	
Date	3.15.2022	Drawn by:	DGO
Job	5854	CLIENT APPROVAL SIGNATURE:	DATE: _/_/_
Description	Show Service Drawings - ELECTRICAL - BOOTH #726		



# BRIGHTLY - 10x10

STEP 1: Place (3x) steel baseplates according to the floorplan.  
Place under carpet and trench padding if client requests.

Pull show floor electrical drops through slit in carpet and  
make sure the wires are powered.

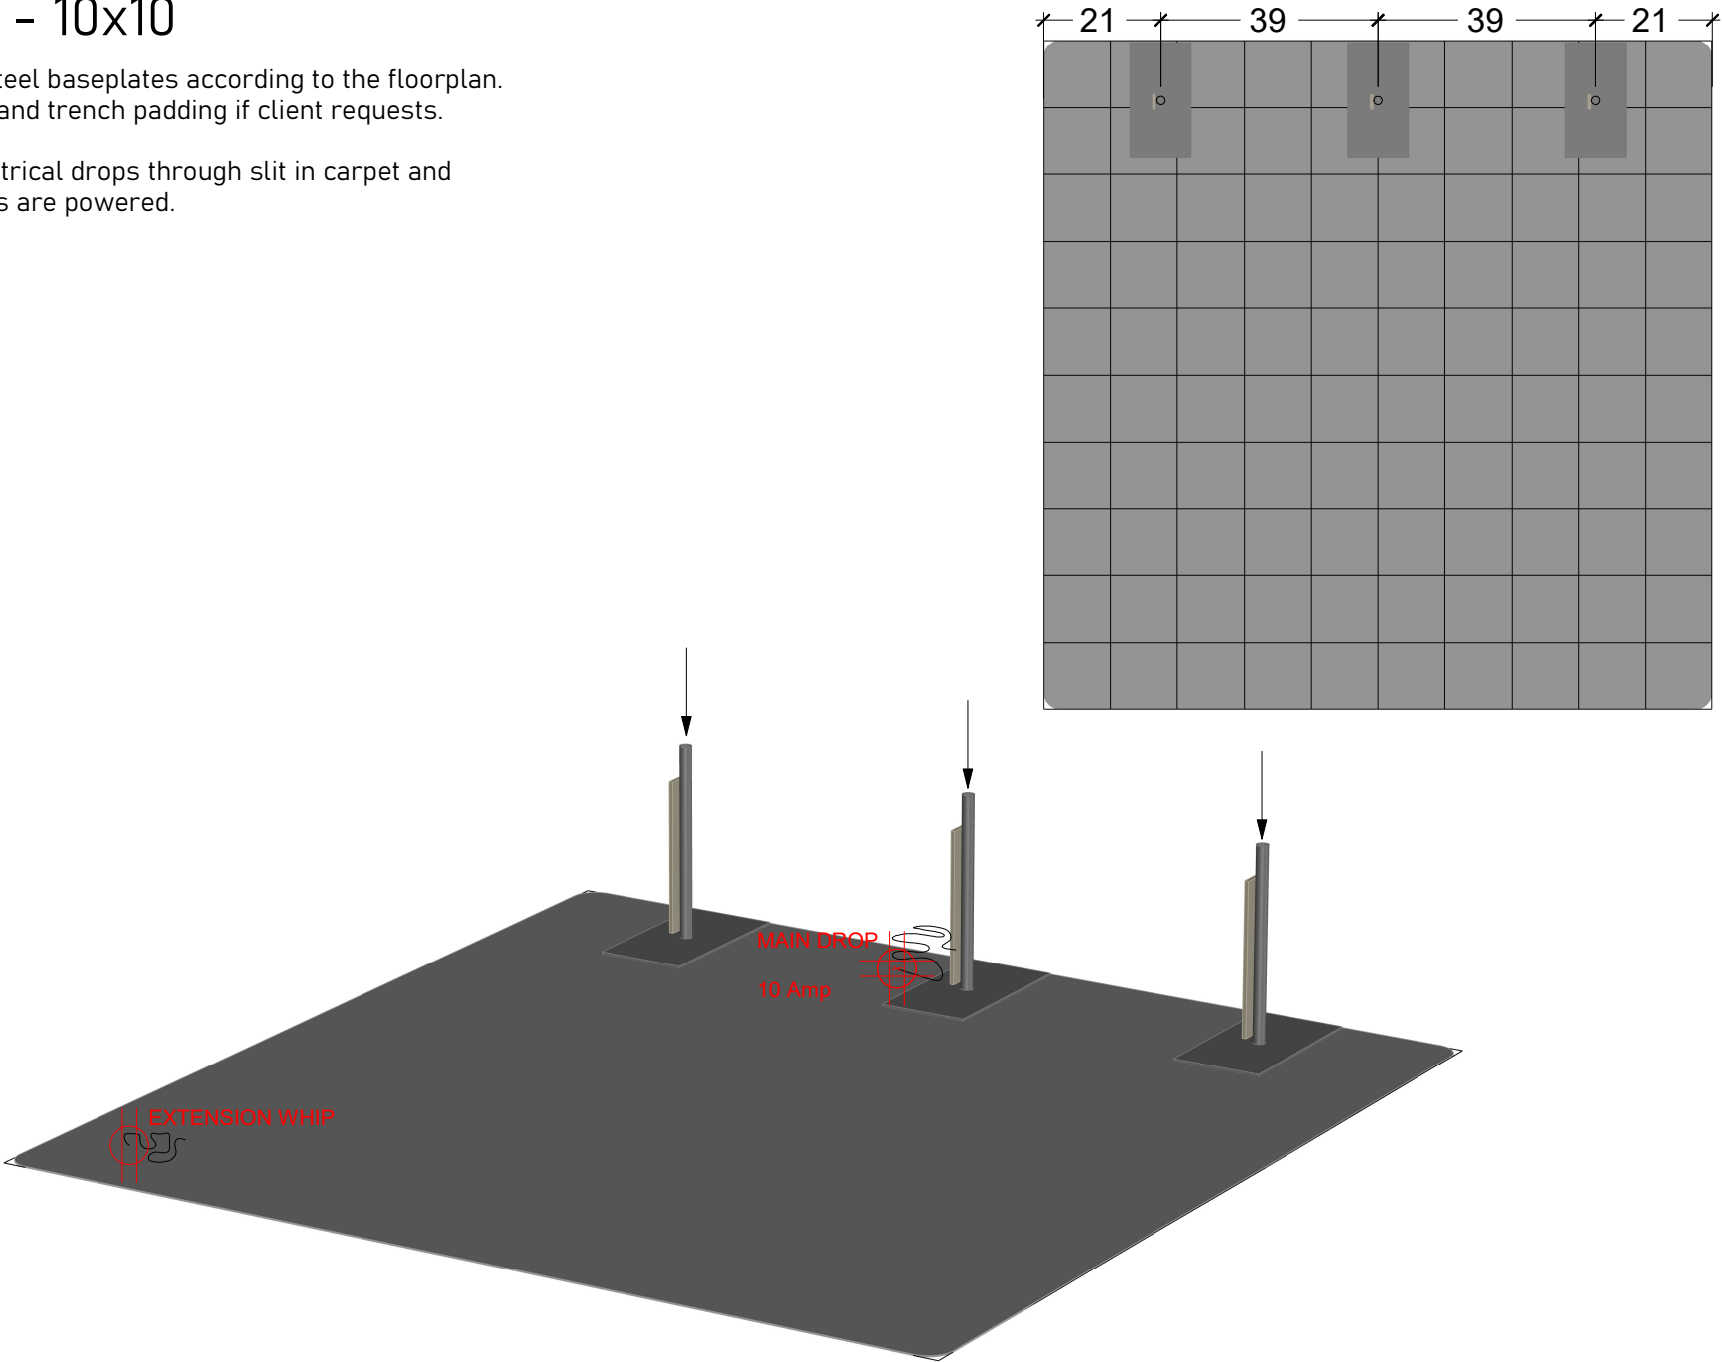


Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: DATE: <u>  </u> / <u>  </u> / <u>  </u>
Job	5751			
Description	Setup Instructions			



# BRIGHTLY - 10x10

STEP 2: Lift Panels 1-3 over baseplates and drop into place.  
Bolt panels together using (5x) 1.5" bolts per seam.

Tighten limit screws on wooden plate  
next to baseplate to stiffen connection.

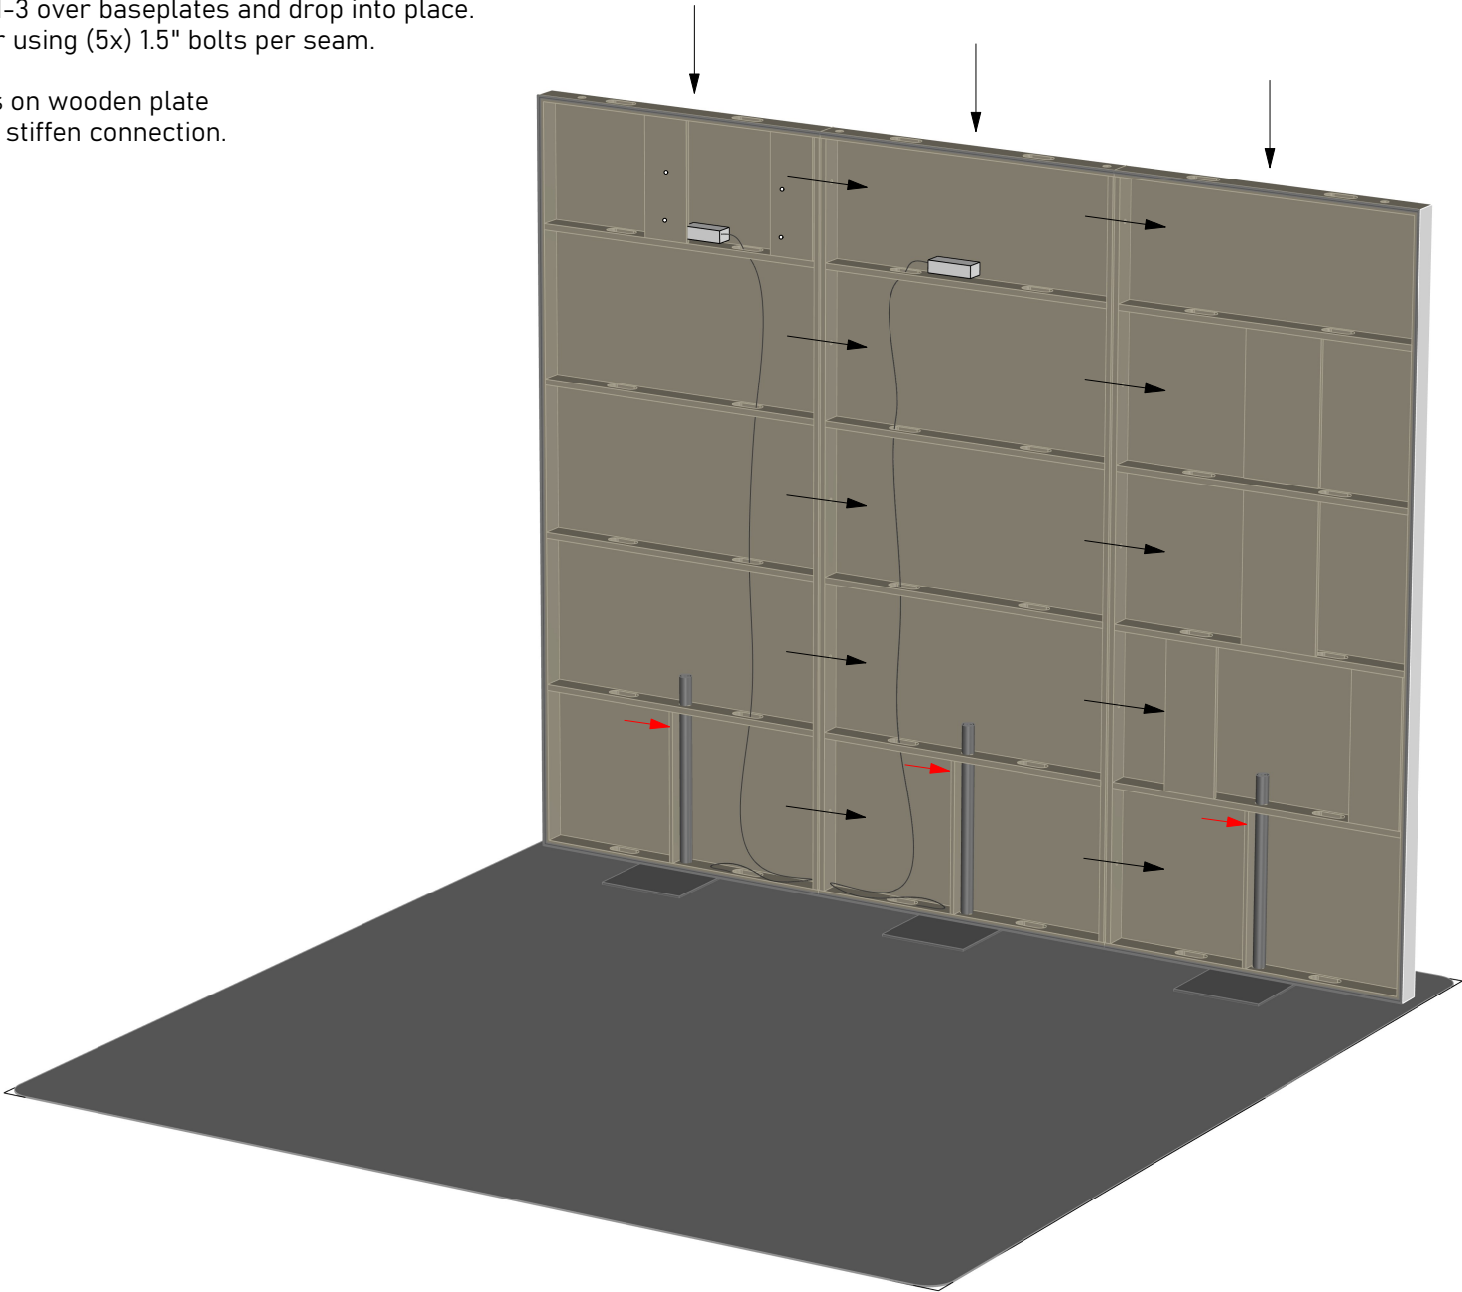

Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by: DGO		
Job	5751		CLIENT APPROVAL SIGNATURE:	DATE: _/_/_
Description	Setup Instructions			




# BRIGHTLY - 10x10

STEP 3: Bolt Lit Header Panels together using (2x) 1.5" bolts.

Drop connected Lit Header Panels into place, registering holes with dowels in top of Panels 1-3.

Bolt Lit Header Panels to backwall using (4x) 2" bolts.

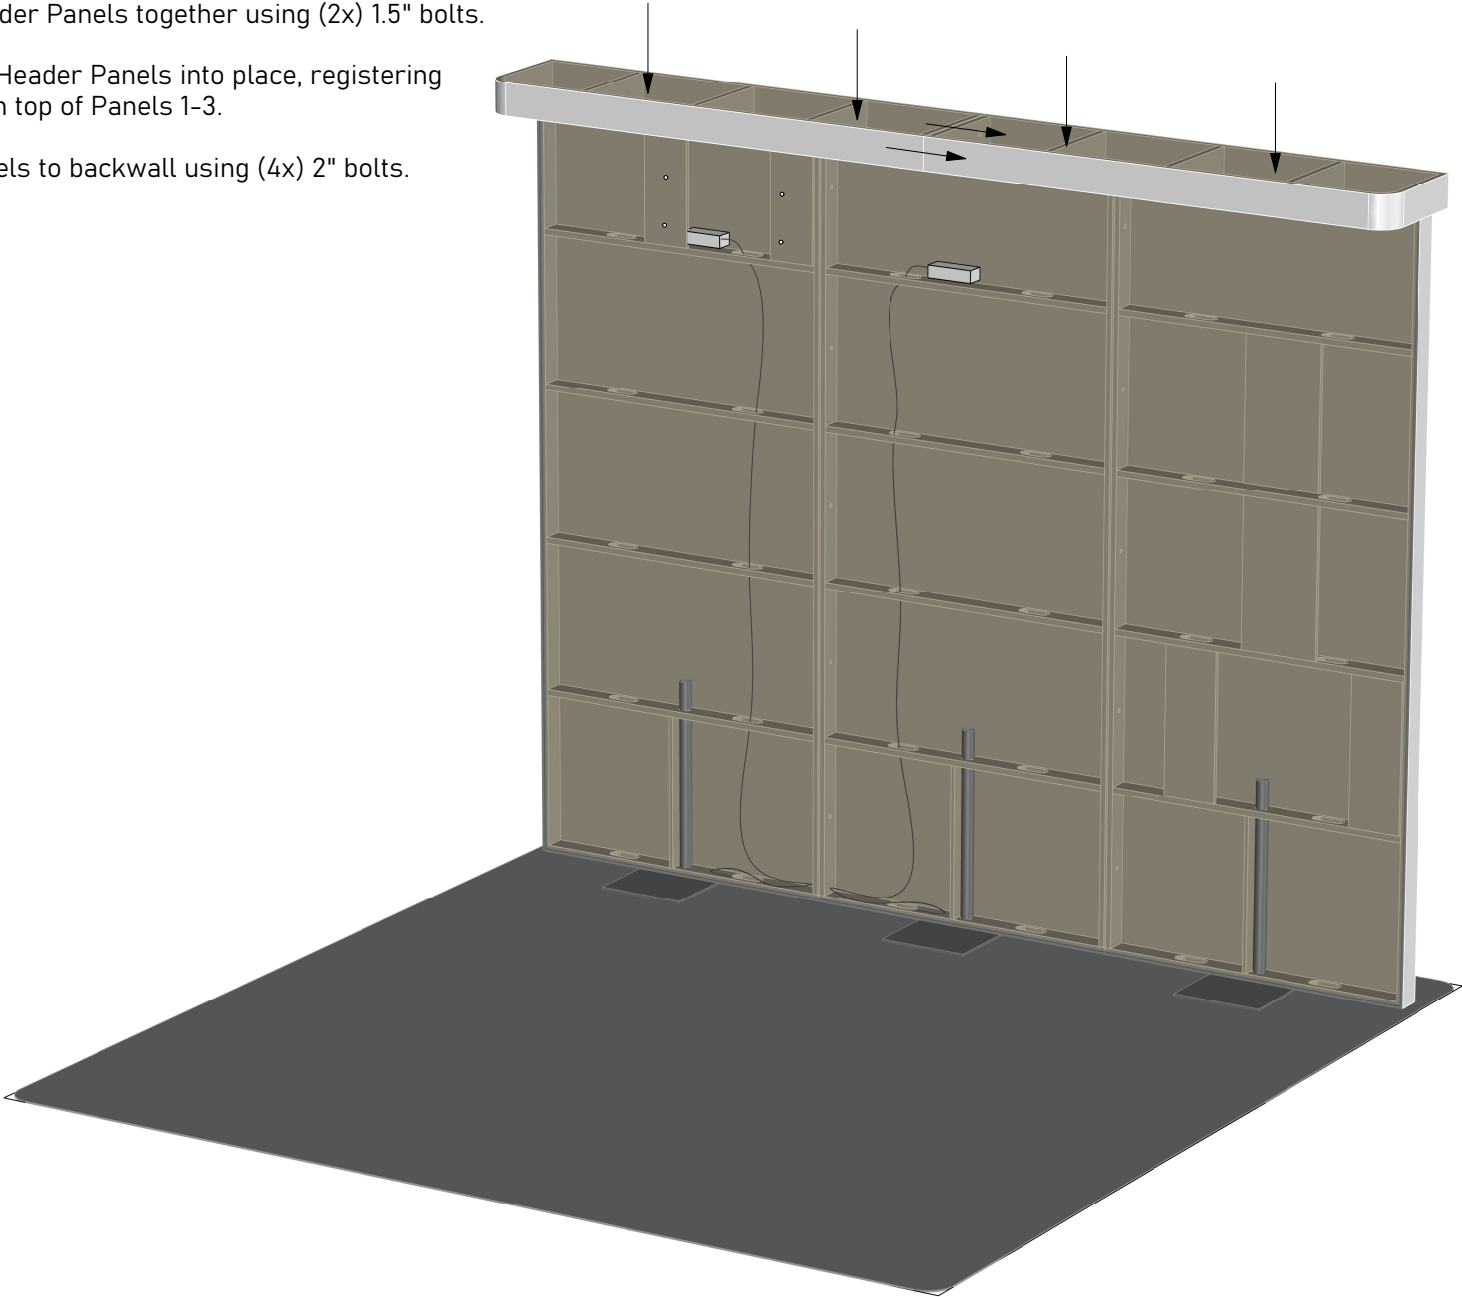

Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:		
Job	5751		CLIENT APPROVAL SIGNATURE:	DATE: _/_/_
Description	Setup Instructions			






# BRIGHTLY - 10x10

STEP 4: Connect internal power strip to show floor electrical drop. Plug in monitor power supply and (2x) LED strips.

Connect LED power whips to LED power supply and test.

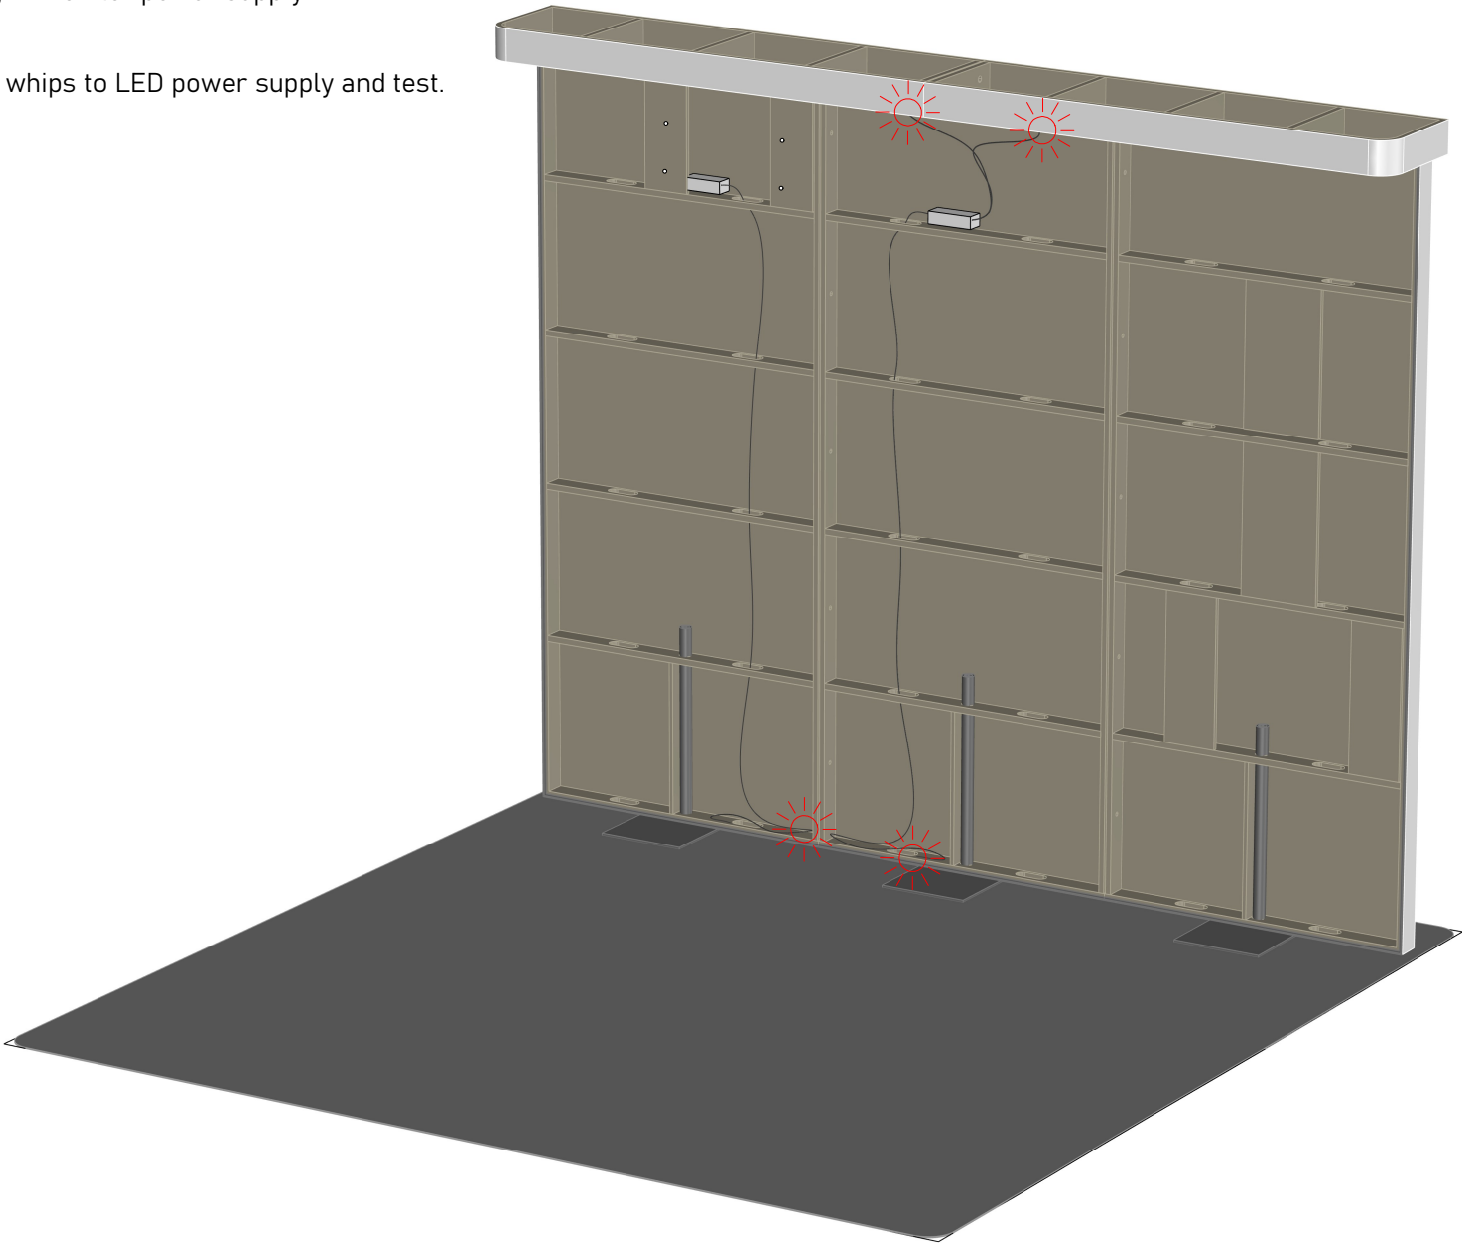

Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____
Job	5751			
Description	Setup Instructions			




# BRIGHTLY - 10x10

STEP 5: Hang SEG graphic by working the gasket into the F-channel aluminum extrusion around perimeter.

Be sure to run 32" Monitor HDMI and power cable, and LED power whip for sign through slit in SEG fabric before completing the install.

Begin at the top edge and work the slack down to the bottom right corner, with pull tab.

Please wear included white cotton gloves while installing to avoid marring the graphic.

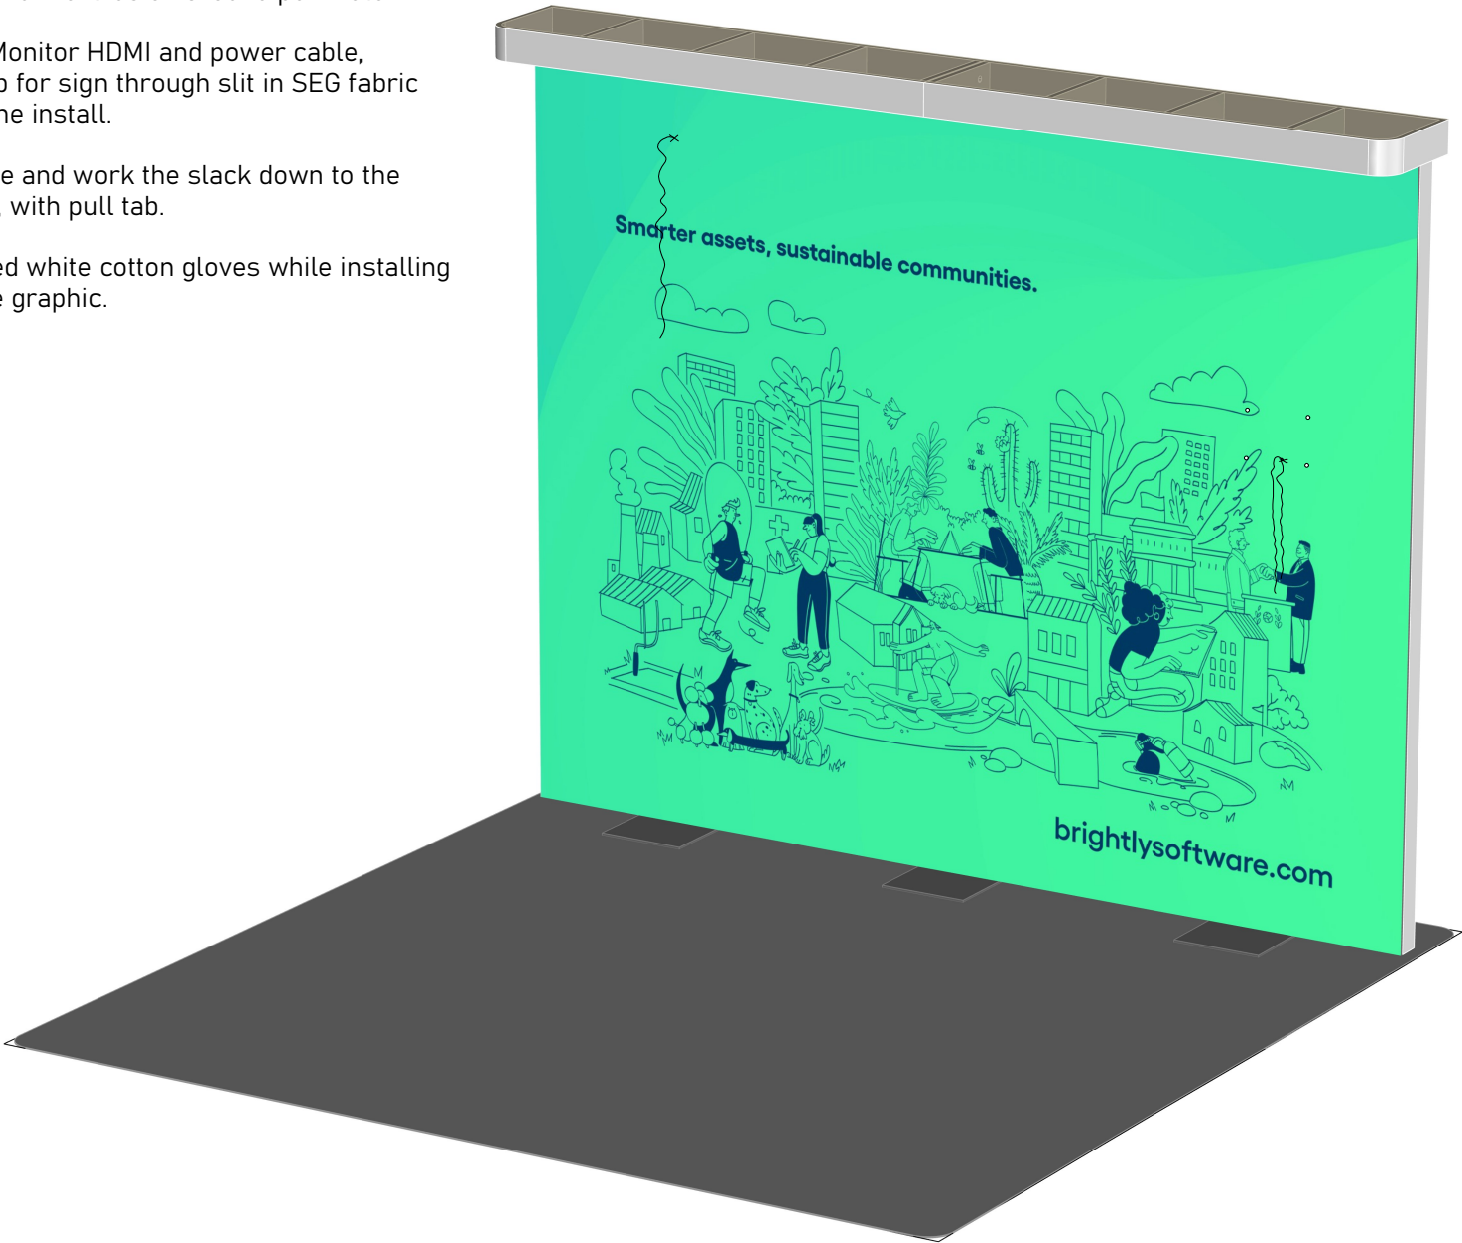


Client	Brightly Software			Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE:	DATE:
Job	5751				__/__/__
Description	Setup Instructions				



# BRIGHTLY - 10x10

STEP 6: Bolt monitor mount to internal wood ribbing using (4x) 3/4" bolts.

Bolt white shelf to internal wood ribbing using (2x) 1.5" bolts.

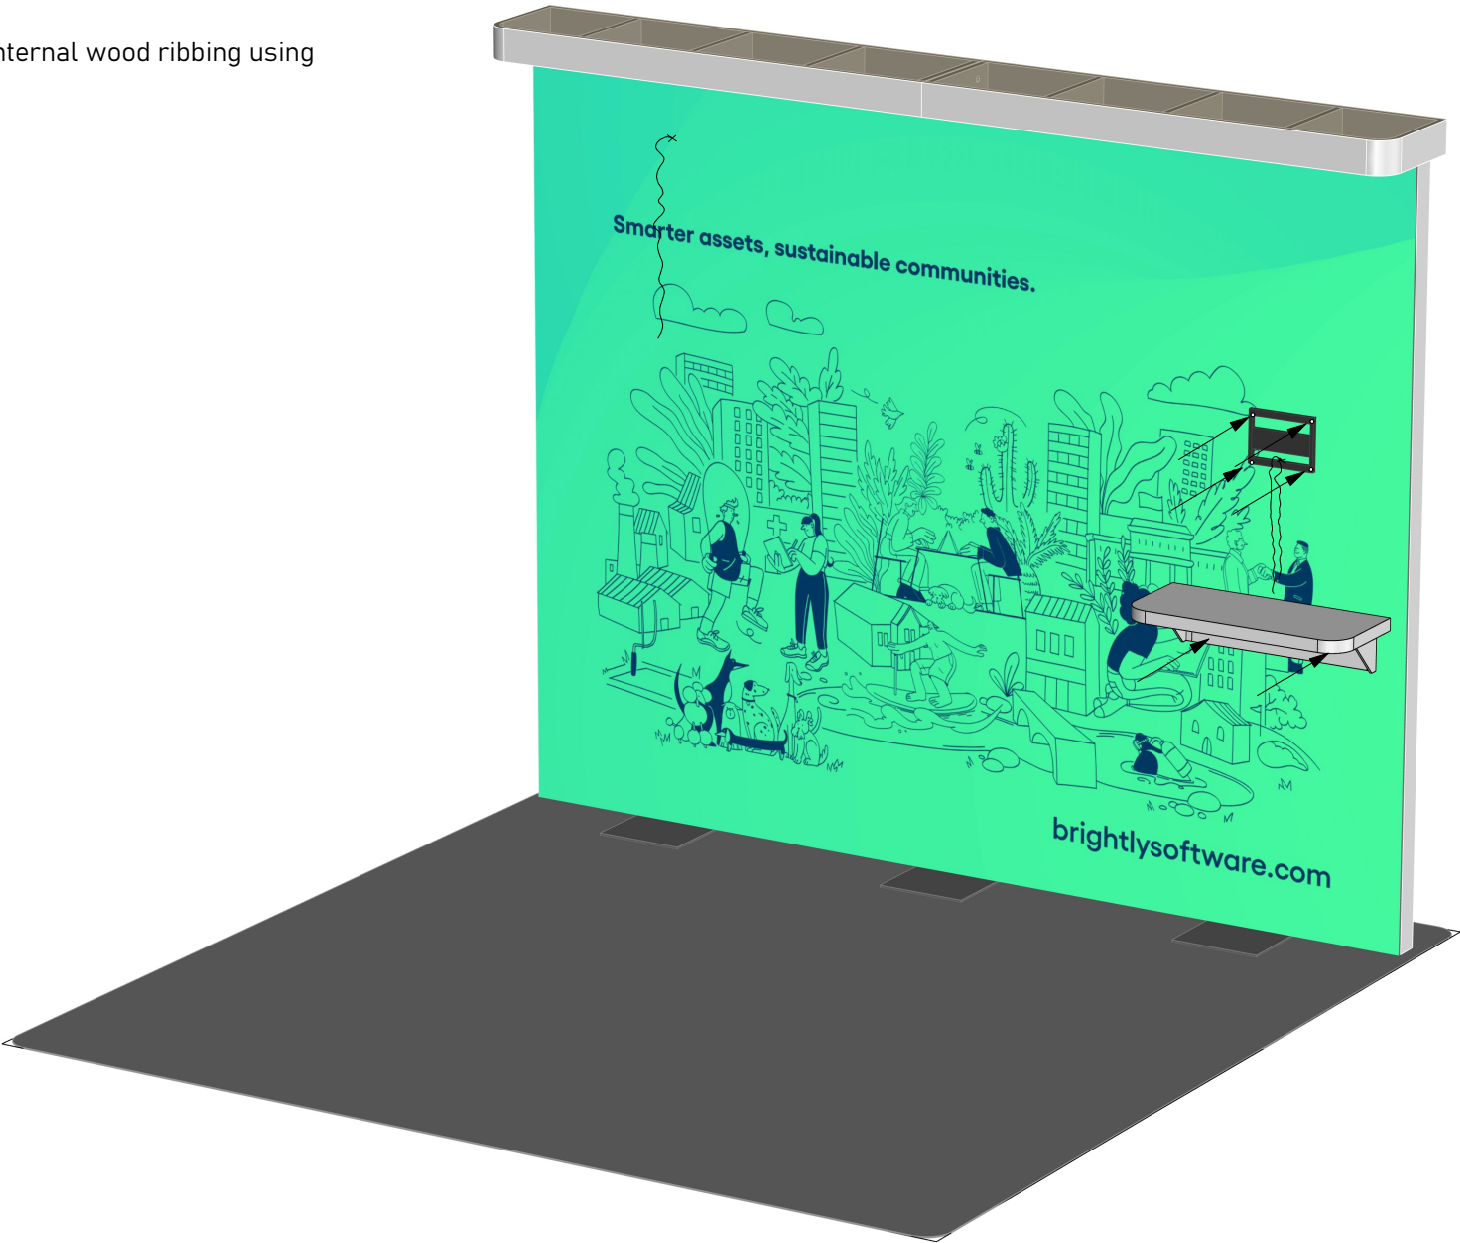


Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:		
Job	5751		CLIENT APPROVAL SIGNATURE:	DATE: _/_/_
Description	Setup Instructions			



# BRIGHTLY - 10x10

STEP 7: Snap Halo Lit Brand Sign to internal ribbing with magnetic connections. Connect LED power supply to turn on.

Cleat 32" Monitor to monitor mount and connect HDMI and power cables. Test before continuing.

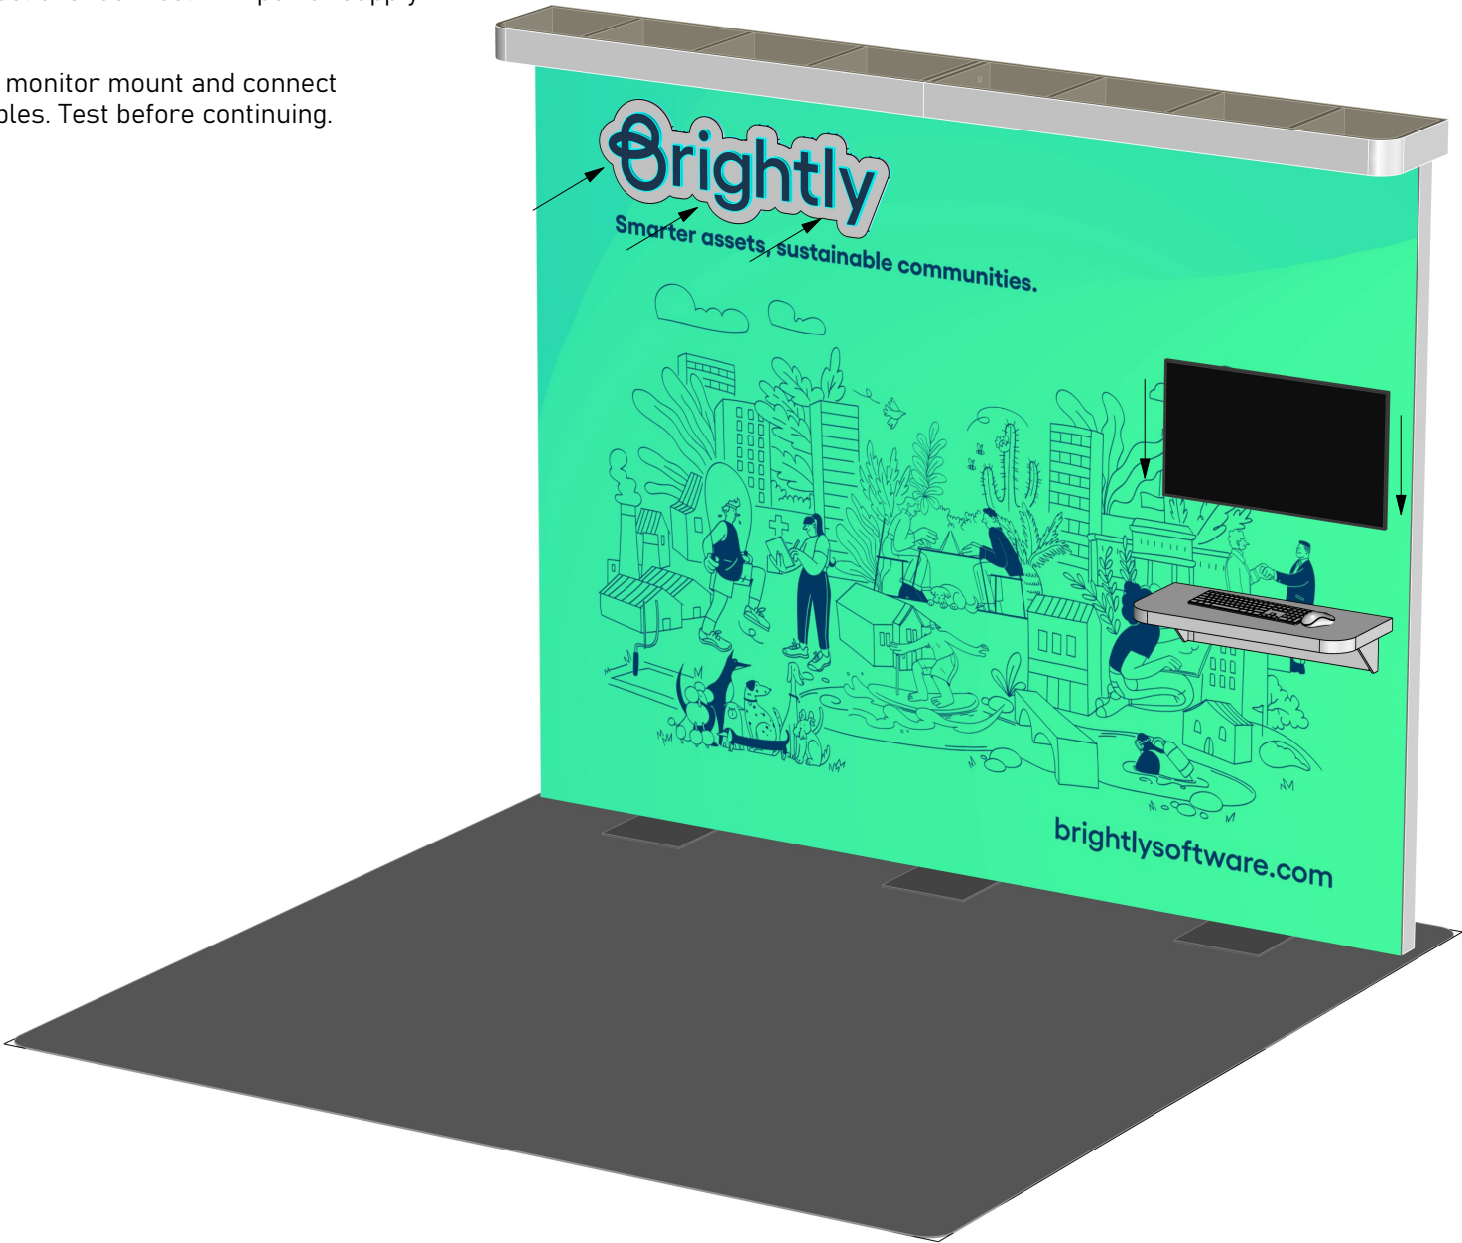

Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____
Job	5751			
Description	Setup Instructions			



# BRIGHTLY - 10x10

STEP 8: Pull Reception Counter from crate and arrange in the front left corner of the booth space.

Pull show floor electrical drop through wire access hole and connect to internal power strip.

Plug LED power supply into internal power strip and test LEDs.



Client	Brightly Software		Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE: _____
Job	5751			
Description	Setup Instructions			





# BRIGHTLY - 10x10

Your booth is now complete. Enjoy the show!



Client	Brightly Software			Notes:	
Date	3.15.2022	Drawn by:	DGO	CLIENT APPROVAL SIGNATURE:	DATE:
Job	5751				__/__/__
Description	Setup Instructions				





EXHIBITS | EVENTS | CREATIVE SERVICES